

E2 Series 60 Hz

FACT SHEET

Reverse osmosis machine 375 to 2535 gallons per day



Figure 1: E2 Series

When you mention reverse osmosis (RO), Veolia is the first name to come to mind. Our E-series RO machines (figure 1) are designed for durable operation, high quality product water production, easy installation and straightforward control.

General Properties

Typical Applications

- Process ingredient water
- Safe drinking water
- Spot free rinse water
- Ion exchange pre-treatment
- R & D lab use

Standard Economy Features (ECN)

- 5-micron pre-filter
- Automatic inlet shut-off valve
- Remote machine on/off capability
- Operating pressure gauge
- Brass pump
- Flow control center including concentrate and recycle valves

Deluxe (DLX) Features – in addition to ECN features

- Low inlet pressure switch
- Conductivity meter
- Stainless steel pump
- Permeate and concentrate flow meters

Table 1: Operating Parameters

Operating Pressure	200-220 psig
Maximum Recovery	50%
Nominal Rejection	95-98%
Operating Temperature	55-85 °F
Minimum Inlet Pressure	30 psig
Design Temperature	77 °F

Table 2: Materials of Construction


Frame	Painted Carbon Steel
Membrane Elements	Desal AG2521TM or AG2540TM
Membrane Housing	Stainless Steel
Tubing	Polyethylene

Table 3: Pump and Motor

Pump Type	Rotary vane
Motor	1-phase, ODP, 110 VAC

Table 4: E2 Specifications - 60 Hz

Model	E2-0375	E2-0750	E2-1125	E2-1690	E2-2535
ECN	1226251	1226259	1226261	1226269	1226274
DLX	1226252	1226260	1226262	1226270	1226275
Flow Specifications					
Recovery Range:	33-50%	33-50%	33-50%	33-50%	33-50%
Permeate Rate: gpm (m ³ /h)	0.3 (0.07) 0.3-0.2 (0.07- 0.04)	0.5 (0.11) 0.5-0.3 (0.11- 0.07)	0.78 (0.18) 0.78-0.5 (0.18- 0.11)	1.2 (0.27) 1.2-0.8 (0.27- 0.18)	1.8 (0.40) 1.8-1.2 (0.40- 0.27)
Concentrate Rate: gpm (m ³ /h)					
Pump and Motor					
Pump	Procon Series 2 or 3			Procon Series 4 or 5	
Motor: HP (KW)	0.5 (0.37)	0.5 (0.37)	0.5 (0.37)	0.75 (0.56)	0.75 (0.56)
Membrane Elements					
Quantity	1	2	3	2	3
Array	1	1-1	1-1-1	1-1	1-1-1
Element Model	AG2521TM	AG2521TM	AG2521TM	AG2540TM	AG2540TM
Connections					
Inlet, Permeate, & Concentrate: inch (cm)	0.38 (0.95)	0.38 (0.95)	0.38 (0.95)	0.38 (0.95)	0.38 (0.95)
Dimensions & Weights					
Height: inch (cm)	30 (76)	30 (76)	30 (76)	51 (130)	51 (130)
Width: inch (cm)	18 (46)	18 (46)	18 (46)	18 (46)	18 (46)
Depth: inch (cm)	15 (38)	15 (38)	15 (38)	15 (38)	15 (38)
Shipping Weight Estimate: lb (kg)	50 (20)	55 (25)	60 (30)	75 (35)	85 (40)

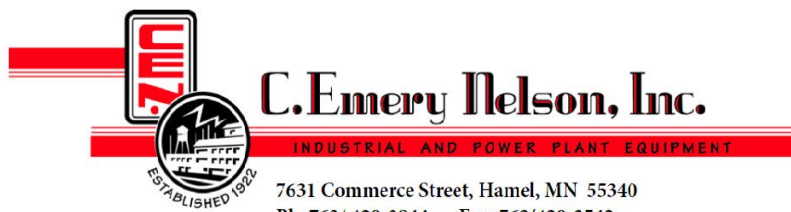

Veolia Water Technologies
Please contact us via:
www.veoliawatertechnologies.com

7631 Commerce Street, Hamel, MN 55340
Ph: 763/ 420-3844 Fax: 763/420-2542